




CDNVRau4-60 Universal 4-output active splitter - for 60 mm electrical box

Universal distributor with active video amplifiers for digital systems. It enables connection of four receivers or separation of the main bus into four independent outputs. It is also possible to connect another distributor or terminate the bus. The maximum distance between the receiver and the distributor is 70m. Mounted on floors, at the installation's assembly point or at the bus distribution point. Module without housing for installation in a Ø60 mm electrical box. Compatible with digital devices from groups: CDNP, Inspiro, Familio P/PV and COMO PRO/PRO-A.

Index	CDNVRau4 - 60
Description	Active splitter without housing
Material	Plastic housing (underside)
Dimensions (mm)	50x50x18
Installation type	Digital: twisted pair cat. 5e or 6
Power supply	15VDC / 50 mA
Stand-by power consumption	~0,8W
Outputs	ARK screw connectors:
	8 x connection of the video output signal: V+ and V-
Inputs	ARK screw connections:
	– 2 x power connection
	- 2 x connection of the input video signal: IN V+ and IN V-
Attributes	- the possibility of increasing the distance up to 300m with the use of additional
	power supplies for receivers
	 connection of up to 4 receivers
	 Splitting the video signal into 4 independent outputs
	- distance to receiver: max 70 m (with appropriate system configuration)
	- Possibility to work as a through or final manifold (built-in video terminator with
	jumper)
	 power supply and operating status of the distributor
	- power suppry and operating status of the distributor

Schema

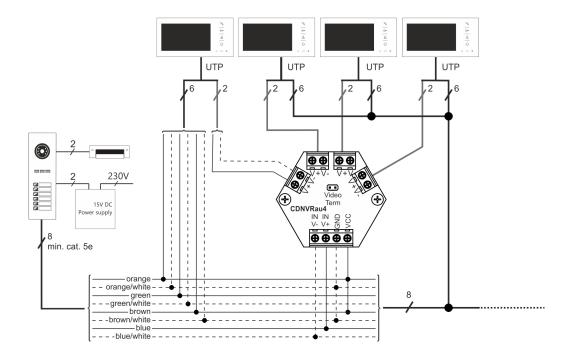

Dimensions

